


**道路用鉄筋コンクリートU形側溝 (掛蓋型) 国土交通省：US1**

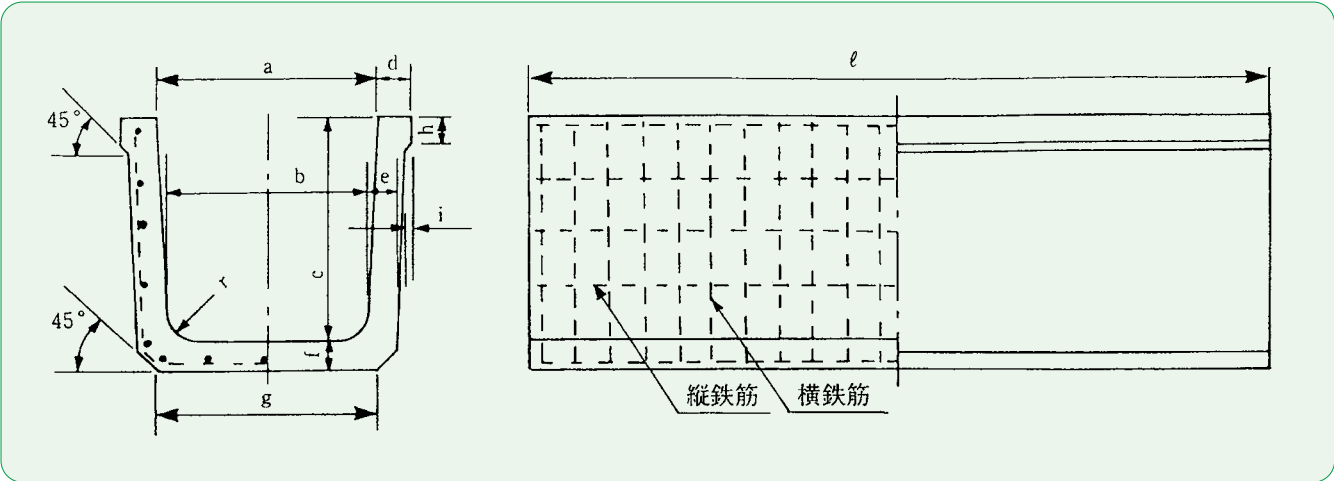

記号	寸法 (mm)											配筋						参考重量 (kg)
												横鉄筋				縦鉄筋		
	底版外側筋	底版内側筋	径 (mm)	本数	径 (mm)	本数	径 (mm)	本数										
掛24	240	220	240	57	50	50	240	35	13	50	3.2	14	-	-	3.2	8	193	
Ⅲ-A-c 30	300	260	300	65	60	60	300	50	17.5	50	3.2	14	-	-	3.2	10	260	
Ⅲ-A-c 35	350	310	350	65	65	65	360	55	17.5	50	3.2	16	-	-	3.2	12	340	
Ⅲ-A-c 40	400	370	400	80	60	60	438	60	20.5	50	4.0	14	-	-	3.2	14	376	
Ⅲ-A-c 45	450	400	450	75	70	70	480	60	22.5	70	4.0	14	-	-	3.2	17	460	
Ⅲ-A-c 50	500	460	500	85	70	70	540	70	35	70	4.0	14	-	-	4.0	14	568	
Ⅲ-A-c 60	600	540	600	90	80	80	600	70	23	70	4.0	18	-	-	4.0	17	714	
掛70	700	650	700	100	95	95	840	100	30	100	D 6	14	-	-	5.5	20	815	
掛80	800	750	800	105	95	95	940	100	30	100	D10	14	-	-	D 6	12	1155	
掛90	900	850	900	110	100	100	1050	100	30	100	D10	15	-	-	D 6	18	1180	
掛100	1000	950	1000	115	110	110	1150	100	30	150	D10	18	-	-	D 6	21	1530	
Ⅲ-A-c 30	300	260	300	65	60	60	300	50	17.5	50	D 6	22	5.0	22	4.0	12	260	
Ⅲ-A-c 35	350	310	350	65	65	65	360	55	17.5	50	D 6	22	5.0	22	4.0	12	340	
Ⅲ-A-c 40	400	370	400	80	60	60	438	60	20.5	50	D 6	26	D 6	14	4.0	14	376	
Ⅲ-A-c 45	450	400	450	75	70	70	480	60	22.5	70	D 6	28	D 6	14	4.0	16	460	
Ⅲ-A-c 50	500	460	500	85	70	70	540	70	35.5	70	D10	14	D 6	14	D 6	16	568	
Ⅲ-A-c 60	600	540	600	90	80	80	600	70	23	70	D10	14	D 6	14	D 6	20	714	
掛70	700	650	700	100	95	95	840	100	30	100	仕様により設計いたします						815	
掛80	800	750	800	105	95	95	940	100	30	100	"						1155	
掛90	900	850	900	110	100	100	1050	100	30	100	"						1180	
掛100	1000	950	1000	115	110	110	1150	100	30	150	"						1530	

記号の無い部分は福島県認定規格外品になります。