


可変横断側溝DHK T-25重荷重

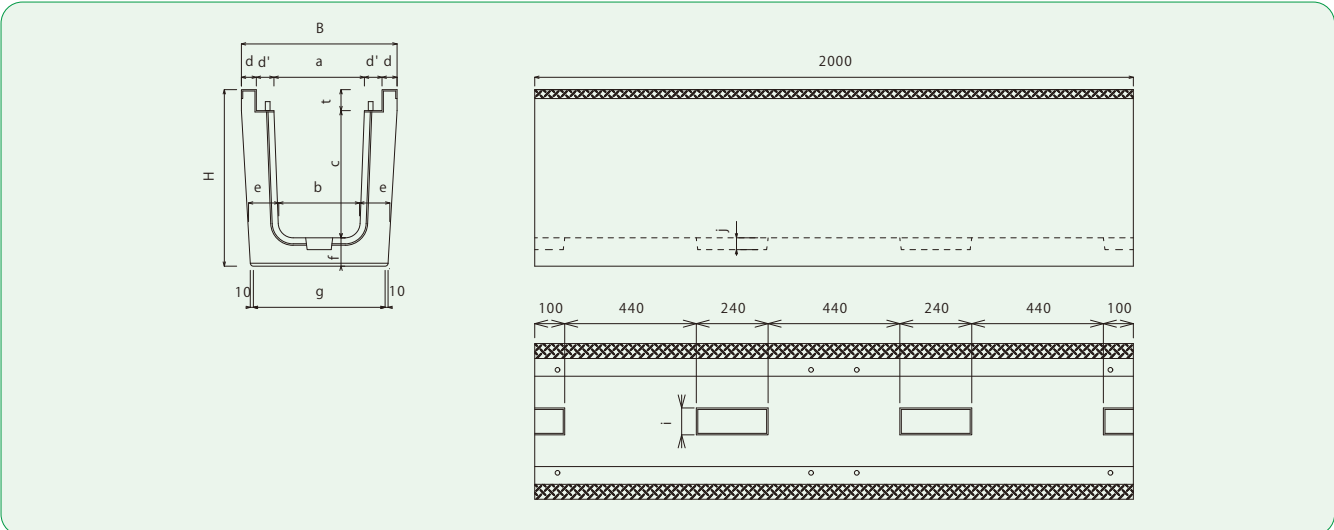

寸法・重量表

呼 称		寸 法 (mm)													参考重量 (kg)	
		B	H	a	b	c	d	d'	e	f	g	t	i	j		r
DHK 250	250A	460	430	252	230	275	45	59	90	90	371	65	90	30	50	462
	300A		485		280	325			98	90	440					565
	300B		590		270	425			101	95	440					684
	300C		690		260	525			105	95	440					794
	300D	520	800	302	250	625	50	59	105	105	429	70	90	40	50	910
	300E		905		240	725			110	110	430					1041
	300F		1010		230	825			115	115	431					1177
	300G		1115		220	925			120	120	443					1345
300H		1225		210	1025			130	130	443					1504	
DHK 400	400A		615		370	425			103	105	540					788
	400B		715		360	525			106	105	540					904
	400C		820		352	625			110	110	541					1017
	400D		925		346	725			115	115	547					1158
	400E	630	1030	402	340	825	55	59	120	120	552	85	150	40	50	1303
	400F		1135		332	925			125	125	555					1453
	400G		1240		324	1025			130	130	558					1608
	400H		1345		316	1125			135	135	561					1769
400I		1450		308	1225			140	140	563					1931	
DHK 500	500A		740		460	525			117	115	660					1041
	500B		840		450	625			121	115	660					1169
	500C		945		444	725			120	120	652					1293
	500D	750	1050	502	436	825	60	64	125	125	656	100	220	45	50	1448
	500E		1155		428	925			130	130	659					1608
	500F		1260		420	1025			135	135	662					1772
	500G		1365		412	1125			140	140	665					1942
	500H		1470		404	1225			145	145	667					2114
DHK 600	600A		870		540	640			120	120	740					1329
	600B		985		530	740			139	135	770					1545
	600C		1080		534	840			130	130	758					1664
	600D	890	1175	604	526	940	70	73	135	125	762	110	260	50	70	1839
	600E		1290		516	1040			140	140	763					2017
	600F		1395		508	1140			145	145	766					2201
	600G		1500		500	1240			150	150	769					2389